

# NETWORK CUBE > CWDM-MUX-4+Exp Module

C-1705-Rev. A

## Product Description


- CWDM module for integration in 1 slot of the CUBO NETWORK CUBE WDM-Modular-Shell (C-1608)
- The module contains 2 pieces of 4 channel + express port CWDM multiplexers (one mux, one demux)
- CWDM multiplexers to mux and demux 4 channels 1471, 1491, 1591 and 1611; these correspond to the transceiver wavelengths from 1470 to 1610 nm
- The Express port may either be used as upgrade for up to 4 further CWDM channels (1511-1571) or as upgrade for one additional “broadband” (1504.5- 1577.5 nm) channel. Typical applications for the Express port: 10G XFP transceivers, standard FP laser , OTDR channel.
- The CWDM multiplexers are compliant with the ITU G.694.2 standard and Telcordia GR1221 (former Bellcore) standard and are designed to meet NEBS level 3
- The sub-system interoperates with any router, switch, DSLAM, SFP and GBIC, which supports the CWDM ITU G.694.2 standard
- Front panel is equipped with adapters according to customer choice (see below).

### Product Description: NETWORK CUBE CWDM-MUX-4+Exp Module

- Product Code: C-1705
- Connector Code: -XY (choose from table below)
- Revision Level: -Rev.A

(X) Common ports	Code
(Y) CWDM channel ports	
SC/PC	1
FC/PC	2
SC/APC	3
FC/APC	4
LC/PC	5
MU/PC	6
E2000	7
E2000/HRL	8
ST/PC	9

Example Order Code: C-1705-11-Rev.A for a module with SC/PC connectors on all ports

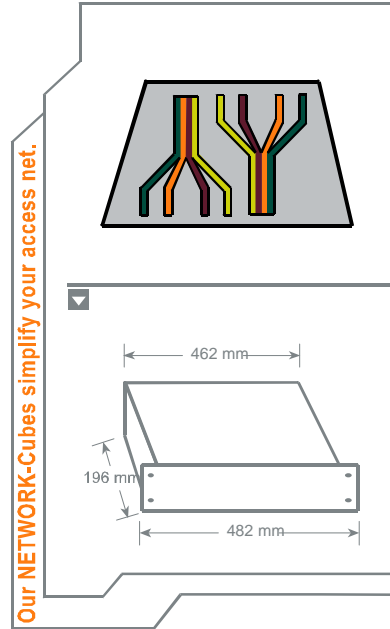

Our NETWORK-Cubes simplify your access net.



## Revision History

No.	Description	Date	Created by	Approved by
A	Initial release	21.03.06	Sven Krüger	Thomas Paatzsch
A	Included typical insertion loss value	26.01.10	Islah Touhtouh	
C				

# NETWORK CUBE

## > CWDM-MUX-4+Exp Module

C-1705-Rev. A

General Specifications	
Operating Temperature	+0°C to +70°C
Storage Temperature	-40°C to +80°C
Max. optical Power	< 250 mW
Package Dimensions	Width: 166 / 182 mm, Height: 25.75 / 44 mm, Depth: 118.5 / 125.2 mm
Fiber Type	SMF-28 compatible $\varnothing$ 9 / 125 / 250 $\mu$ m
Optical Adapters	as defined by customer via order code

### Optical Performance of each of the 2 Multiplexers (1 mux, 1 demux, incl. Ug)

Operating Channels		
CWDM [nm]	C1=1471 C2=1491 C3=1591 C4=1611	
Express [nm]	Exp = 1511 - 1571	
Channel Width		
CWDM channels	> 13 nm	
Express ("Exp") channel	1504.5-1577.5 nm	
Insertion Loss	max <sup>1</sup>	typical <sup>2</sup>
CWDM channels	< 2.5 dB	1.8 dB
Express ("Exp") channel	< 2.5 dB	1.5 dB
Isolation		
CWDM adjacent channel	> 30 dB	
CWDM non-adjacent channel	> 40 dB	
CWDM channels at Exp port	> 28 dB	
Exp channel at CWDM ports	> 30 dB	
Isolation spectral range	1460 nm to 1620nm	
Polarization Dependent Loss	< 0.2 dB	

#### Notes:

1. Max. insertion loss over channel bandwidth, valid over full operating temperature range and all states of polarization with optical connectors. The typical connector loss is 0.4 dB for a pair of connectors
2. Typical insertion loss is defined as typical value over channel bandwidth, full operating temperature range and methods from actual production data to reflect the majority of cases.


# NETWORK CUBE

## > CWDM-MUX-4+Exp Module

C-1705-Rev. A


### Package Dimensions and Front Plate design

**Logical setup:**

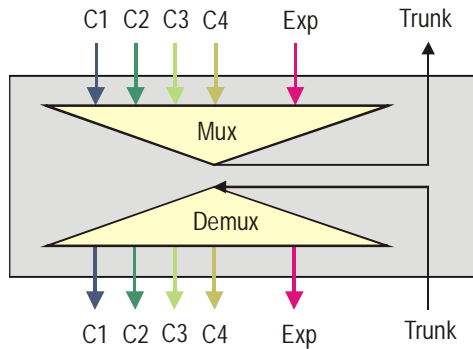

**Connection Scheme:**

- The module contains the adapters for one CWDM multiplexer including express channel (top) and one CWDM demultiplexer including express channel.
- The channels are marked with “1470”, “1490”, “1590” and “1610” corresponding to the 4 corresponding transceiver wavelengths, respectively as “exp” for the express port.
- The common ports are marked as “Trunk”.

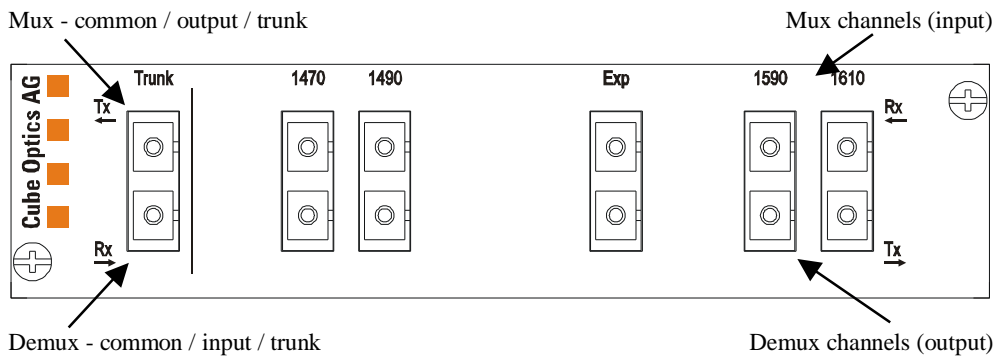


Please, note that the actual layout depends on the chosen connector type as well as other factors. However, the principal scheme stays the same.

**Layout and dimensions (see also next page)**



- Width: 166 / 182 mm
- Height: 25.75 / 44 mm
- Depth: 118.5 / 125.2 mm
- The color of the module is light gray
- All fonts and labels are printed in black.

NETWORK CUBE  
 > CWDM-MUX-4+Exp Module

C-1705-Rev. A

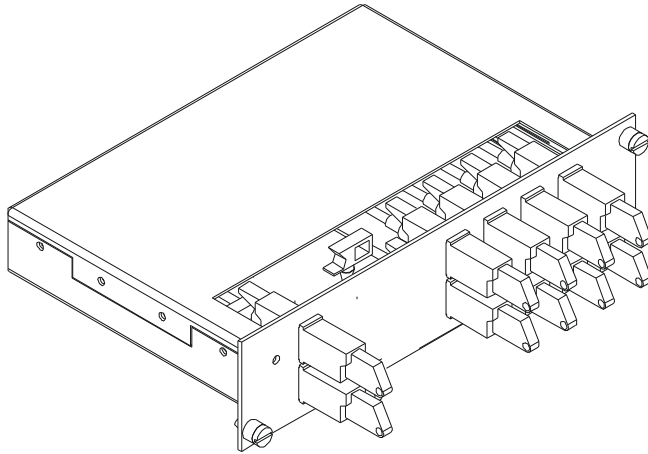

**Please, note that the drawings shown here only show the dimensions and do not the specific configuration of the module!**

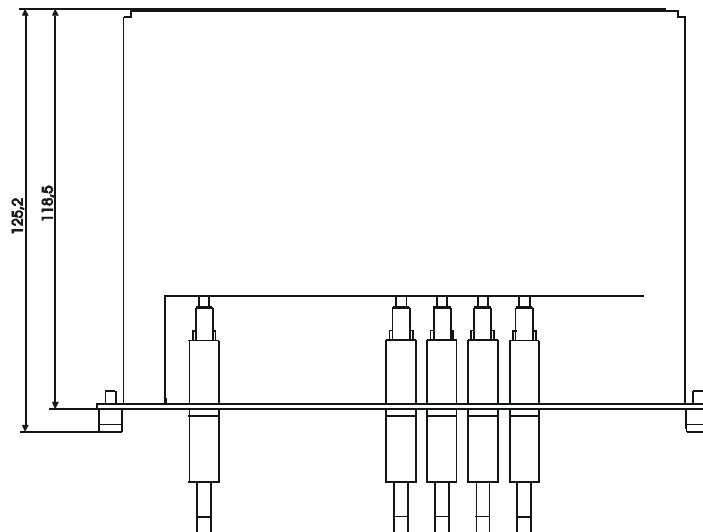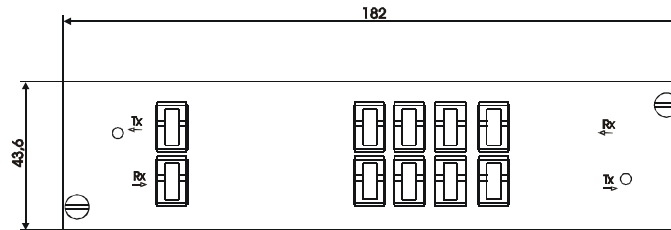

Corporate Office:  
 Cube Optics AG  
 Robert-Koch-Strasse 30  
 55129 Mainz  
 Germany

Fon: +49-6131-69851-0  
 Fax: +49-6131-69851-79  
 e.mail: sales@cubeoptics.com

[www.cubeoptics.com](http://www.cubeoptics.com)