


Coarse Wavelength Division Multiplexer – CWDM

> mux or demux, 8 channels, single mode



Features

- Device works as a multiplexer, demultiplexer or in a bidirectional single fiber link
- Multiplexer and Demultiplexer paired for lowest link loss
- Micro-hybrid design in a sealed metal housing
- Epoxy free optical path
- RoHS compliant per EU Directive 2002/95EC
- UL 94 V0 flammability rating
- Tested in accordance with Telcordia GR-1209/1221, uncontrolled environment
- Fit for outside plant deployment

Applications

- Combines / separates 8 channels with a 20 nm spacing
- Metro Core, Metro Access, Metro Enterprise, Cable TV, 3G Telephony (UMTS), Datacomm, WAN, RFTS, Sensor Applications
- Analog and digital transmission systems


Specifications

Parameters	Coarse Wavelength Division Multiplexer – mux/demux (all values refer to single mode / multi mode: see separate datasheet)	
Channels	8	
Center Wavelength [nm]	8 out of 10 adjacent channels	
Band 1 (red band)	1471 / 1491 / 1511 / 1531 / 1551 / 1571 / 1591 / 1611	
Band 2 (blue band)	1271 / 1291 / 1311 / 1331 / 1351 / 1371 / 1391 / 1411 / 1431 / 1451	
	other wavelength upon request; please contact CUBO	
Optical Bandwidth	> 13 nm (higher bandwidth on request)	
Insertion Loss *	Standard < 2.4 dB	Premium < 2.0 dB
Link Loss * for mux – demux pair	Standard < 4.3 dB	Premium < 3.5 dB
Isolation **	adjacent channel	> 30 dB
	non-adjacent channel	> 40 dB
	Isolation Spectral Range Band 1 (red)	1460-1620 nm
	Isolation Spectral Range Band 2 (blue)	1260-1460 nm
Return Loss *	> 45 dB (50 dB typ.)	
Directivity (for mux)	> 50 dB	
Polarization Dependent Loss	< 0.2 dB	
Max. optical power	250 mW	
Operating Temperature	0°C to 70°C (-40°C to 85°C on request)	
Storage Temperature	-40°C to 85°C (when removed from plastic package)	
Package Dimensions	19 x 15.5 x 9 mm ³	

* With passband, valid over full temperature range and at all states of polarization but without connector losses.

** Valid over full temperature range and at all wavelengths across the channel.

Additional components according to your specifications on request! Please contact Cube Optics for further details.

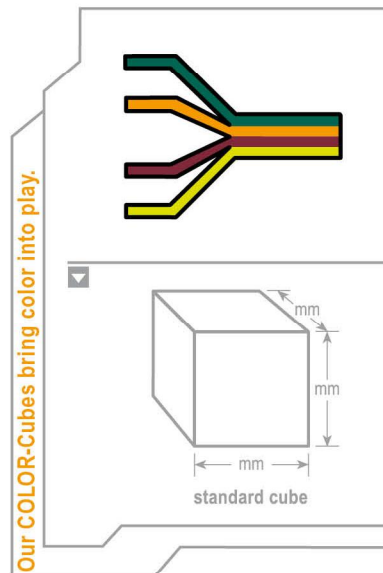

All information contained herein is believed to be accurate and is subject to change without notice. No responsibility is assumed for its use. Cube Optics AG, its subsidiaries and affiliates, or manufacturer, reserve the right to make changes without notice, to product design, product components and product manufacturing methods. Some specific combinations of options may not be available. Please contact Cube Optics AG for more information.

