


Fiber optical attenuator Plug-in Type

> single mode or multi mode



Specifications


Bulkhead (Plug-in) Type			
Connector Type	SC FC ST		SC FC
Mode	single mode		multi mode
Operating Wavelength (nm)	1310 & 1550 (±25)		850 & 1310
Attenuation (dB)	1 - 30		1 - 20
Tolerance (dB)	±15% (< 5dB, ±0.75dB)		1~10dB: ± 1dB
	±10% (<5dB, ±0.5dB)		11~20dB: ± 2dB
Return loss (dB)	PC>45 UPC>55 APC>65		-

Air Gap Type available by request.

Ordering Information

Indicate your requirements by selecting one option from each configuration table. Please write the corresponding codes in the available boxes to form your part number. For more information on this or other products and their availability, please contact Cube Optics AG at +49-6131-69851-0 or via e.mail at sales@cubeoptics.com, or visit our website at www.cubeoptics.com.

Ordering example: FA-X-B-2-C-05-A-O-30

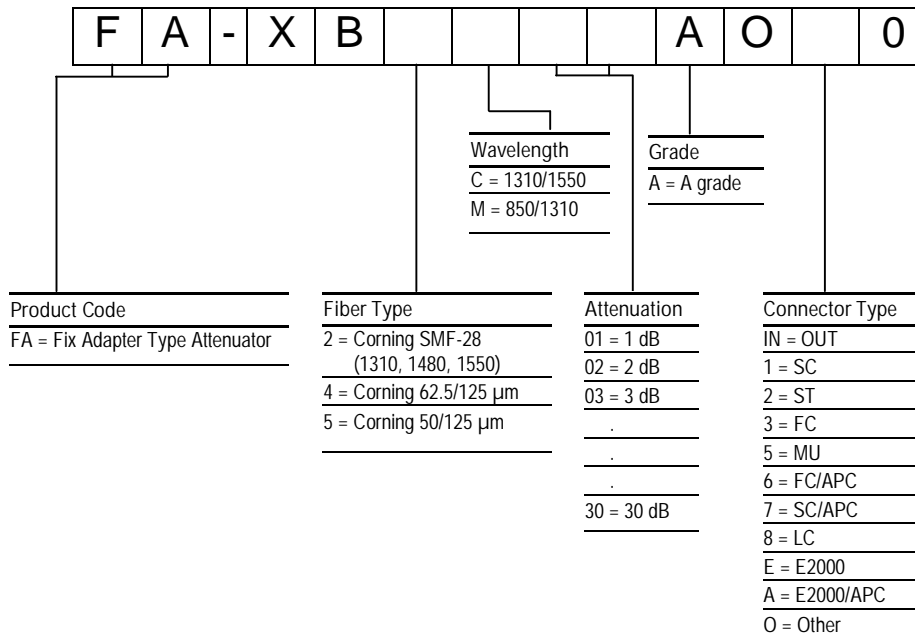

Corporate Office:
Cube Optics AG
Robert-Koch-Strasse 30
55129 Mainz / Germany

phone: +49-6131-69851-0
fax: +49-6131-69851-79
sales@cubeoptics.com
www.cubeoptics.com

V 11.1 09/2009
1/1