

## Coarse Wavelength Division Multiplexer – CWDM mux or demux, 4 channels (reduced size)

### Features

- Devices may be used as multiplexer or demultiplexer
- Micro-hybrid construction in a sealed metal housing
- Epoxy-free optical path
- Extremely small component dimensions: 17.1 x 12.5 x 6.5 mm<sup>3</sup>, other dimensions on request
- Fiber packaging: loose tube or 250 µm coating

### Applications

- Combines / separates 4 channels with a 20 nm spacing
- Optimized package for CFP transceiver modules
- According to 40 Gbps IEEE 802.3ba standard

### Specifications

Parameters	Coarse Wavelength Division Multiplexer – mux/demux (all values refer to single mode)		
<b>Channels</b>	4		
<b>Center Wavelength [nm]</b>	1271 / 1291 / 1311 / 1331 other wavelength upon request; please contact CUBO		
<b>Optical Bandwidth</b>	> 13 nm (higher bandwidth on request)		
<b>Insertion Loss *</b>	4 channel CWDM	Standard < 2.0 dB	Premium < 1.5 dB
<b>Isolation **</b>	adjacent channel	> 30 dB	
	non-adjacent channel	> 40 dB	
	Isolation Spectral Range	1260-1460 nm	
<b>Return Loss *</b>	> 45 dB (50 dB typ.)		
<b>Directivity</b>	> 50 dB		
<b>Polarization Dependent Loss</b>	< 0.2 dB		
<b>Max. optical power</b>	250 mW		
<b>Operating Temperature</b>	-5°C to 75°C		
<b>Storage Temperature</b>	-40°C to 85°C (when removed from plastic package)		
<b>Package Dimensions</b>	17.1 x 12.5 x 6.5 mm <sup>3</sup>		

\* With passband, valid over full temperature range and at all states of polarization but without connector losses.

\*\* Valid over full temperature range and at all wavelengths across the channel.

### Coarse Wavelength Division Multiplexer – CWDM mux or demux, 4 channels (reduced size)

#### Ordering Information

Please select an option from each configuration table and write the corresponding codes in the applicable boxes to create the part number.

Ordering example: **C-40-A-C-S-R-12-1-A-15**

C -  -  -  -  -  -  - 1 2 -  -  -  -

no. of channels	code	mux or demux code	grade	code	Fiber length	code	Connector in/out*	code
4	40	No distinction* A uniform losses, works as mux or demux	Standard	S	0.5 m	A	none	0
			Premium	P			SC/PC	1
							FC/PC	2
							SC/APC**	3
							FC/APC**	4
							LC/PC	5
							MU/PC	6
							E2000	7
							E2000/HRL**	8
							ST/PC	9


housing	code	fiber type an packaging	code
Reduced size	R	Corning SMF-28™ (9,125,250 μm) 900 μm loose tube	1
		Corning SMF-28™ (9,125,250 μm) 250 μm coating	2
		Corning SMF-28™ (9,125,250 μm) 250 μm coating color coded fiber ports	C

Center wavelengths (nm)	code
1271 / 1291 / 1311 / 1331	C


connectors only available in combination with loose tube fiber protection  
\* device regarded as demultiplexer  
\*\* 8° angular polishing

Further configuration on request!


#### Reduced size 4 channel housing

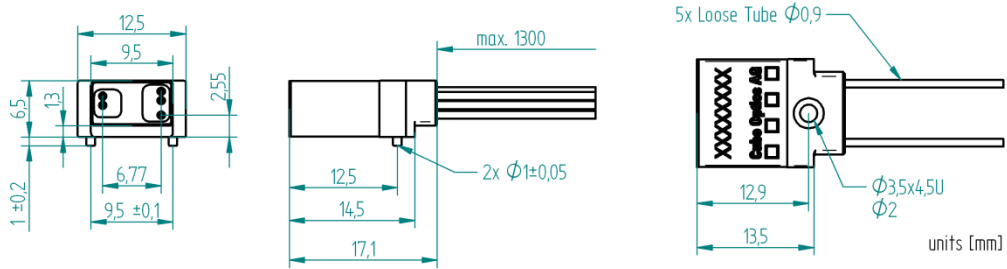

All housing dimensions +/-0.2 if not otherwise specified.

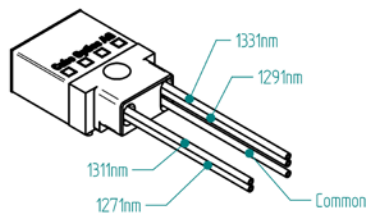

Port assignment for optional colour coded fibres:

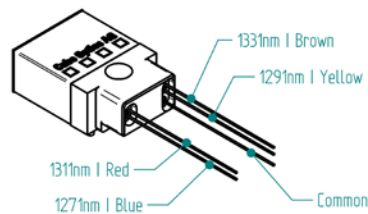

HUBER+SUHNER Cube Optics AG  
is certified according to ISO 9001.

#### WAIVER

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.

HUBER+SUHNER Cube Optics AG  
Robert-Koch-Strasse 30  
55129 Mainz  
Germany

phone: +49-6131-69851-0  
fax: +49-6131-69851-79  
sales.cubo@hubersuhner.com

www.hubersuhner.com  
www.cubeoptics.com